



FiberOne Connectivity's Outdoor Drop Cable Assembly was designed for termination on 1 Fiber Flat Drop cable and is part of a fiber to the home deployment system. Pre-terminated drop cables reduce installation time and cost.


**Features:**

- Proven design provides a hardened connector for outside plant deployment
- Single fiber, singlemode SCAPC hardened connector
- Connector can be installed on flat drop cable or 3.0mm Dielectric Cable
- Environmentally sealed connector housing permits rapid connection to external flush mount bulkhead adapter
- Robust design keeps connector intact during installation
- Integral pulling eye/connector cap designed for 100 lbf maximum pulling tension

**Specifications:**

Typical Insertion Loss:	0.15 dB
Typical Return Loss:	65 dB
Telcordia GR-3120:	Capable

## Outdoor Drop Cable Schematic

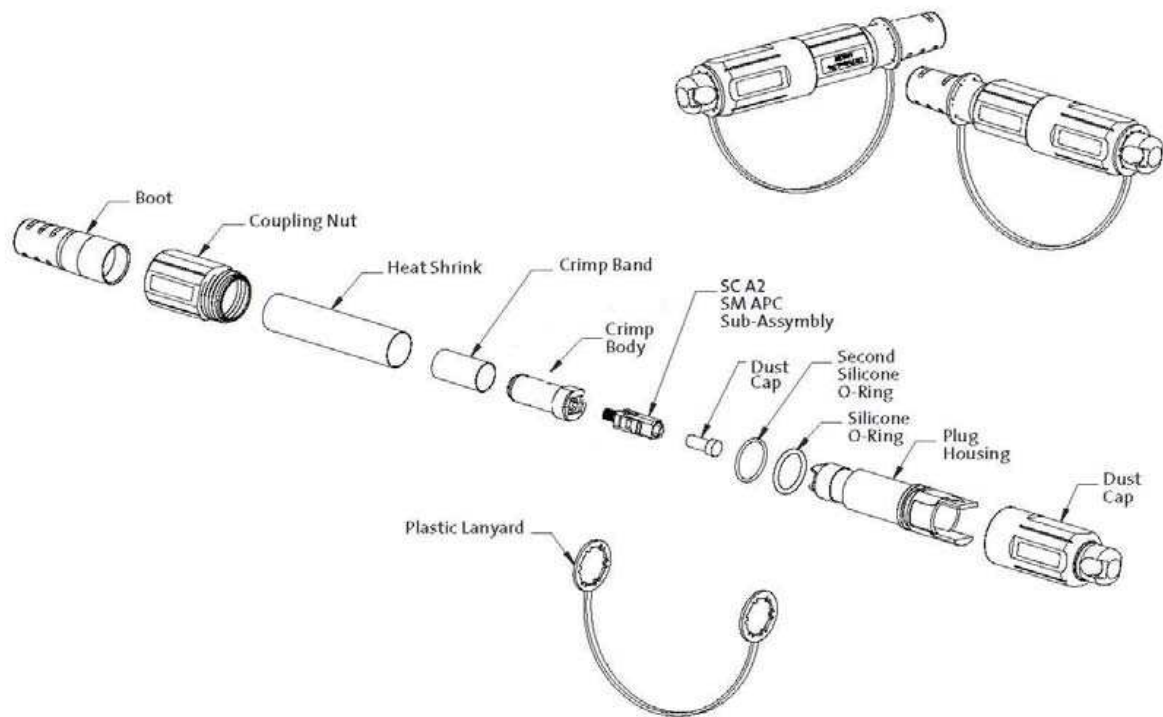

\*Manufactured under license from Corning Cable Systems

